



Model	ProjectoWrite3 WX25NU / X25NU
Technology	WX25NU: 59 in 3LCD IR based interactive system X25NU: 63 in 3LCD IR based interactive system
Brightness	2500 Lumens
Eco Mode Brightness	1750 Lumens
Native Resolution	WX25NU: 1280 x 800 (WXGA) X25NU: 1024 x 768 (XGA)
Supported Resolution	1600 x 1200 (UXGA)
Colors	16.7 million
Brightness Uniformity	80%<
Projection Methods	Tabletop front/rear; Ceiling front/rear
Projection Distance	2 ft to 4.2 ft / 0.61 m to 1.28 m
Contrast Ratio	600:1
Aspect Ratio	WX25NU: Native 16:10; Compatible 16:9 and 4:3 X25NU: Native 4:3; Compatible 16:9 and 16:10
Image Size	49 in to 100 in / 124.5 cm to 264 cm
Keystone Correction	Vertical +/- 30°
Horizontal Scan Rate	31 to 92 kHz
Vertical Scan Rate	48 to 120 Hz
Audio Output	1 x 8W mono
Lamp	210W UHP
Lamp Life	3000 (standard) / 5000 (economy)
Optical Offset	163% / 120%
Remote Control	Multi-function IR remote with laser pointer
Noise Level	36dB (standard) / 33dB (economy)
Power Supply	Universal AC Input 100–240V at 50-60 Hz
Power Consumption	310W <1W in standby mode
Safety Certifications	FCC-B, UL, CB, CE, CCC, ROHS, REACH
Computer Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA resized; VESA standards; PC and Macintosh compatible. USB 1.0 or greater required
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	VGA x 2*, HDMI, composite video with 2 RCA (R/L) audio-in, component video, S-Video, audio 3.5 mm in x 2, LAN, RS232, USB port for interactive function, VGA* and 3.5 mm outputs *2 VGA inputs. 2nd VGA input is input or output optional
Service and Network Control	RS232 and RJ45
Weight	9 lbs / 4.1 kg
Dimensions (W x H x D)	14.2 in x 5.2 in x 13.7 in / 36.1 cm x 13.2 cm x 34.8 cm
Operating Temperature	41° ~ 95° F, Humidity 20% to 80%, non-condensing
Standard Accessories	3 m AC power cord, 2 m VGA cable, 2 m USB cable, remote control with batteries, user manual (CD), LightPen3 software, interactive wand and pressure sensitive LightPen, carry case for wand and pen
Optional Accessories	Replacement lamp, replacement remote, ALLINONE ceiling mount, Wallmount-U, Wallmount-U 60, USB booster
Safety	Kensington lock port, keypad lock, anchor security bar
LIGHTPEN SYSTEM REQUIREMENTS	
USB	1.0 or greater for all systems
LIGHTPEN3 MAC	
Operating System	MAC OS X V10.5 and above
System Processor	Intel processor
System Memory	512 MB or greater
Free Disk Space	100 MB
LIGHTPEN3 PC	
Operating System	Windows XP (SP2) / Windows Vista (32 bit) / Windows 7 (32/64 bit)
System Processor	Intel Pentium 2.4 GHz or above (dedicated GPU recommended)
System Memory	512 MB
Free Disk Space	100 MB
LIGHTPEN3 LITE PC	
Operating System	Windows XP (SP2) / Windows Vista (32 bit) / Windows 7 (32/64 bit)
System Processor	Intel Pentium-M 1.5 GHz or above (dedicated GPU is recommended)
System Memory	512 MB
Free Disk Space	100 MB

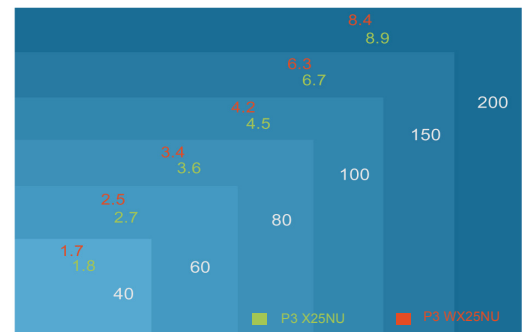

Key Features

- Ultra short throw 0.63:1
- 100% faster response time (60 frames per second)
- Accurate within 3 pixels
- System on Chip technology
- Human Interface Device (HID) technology
- Annotate over full motion video
- Compatible with any mouse application on PC or Mac with included SP drivers
- Save your drawings/images/edits on your computer for later viewing
- Plug and play
- Retrofitable
- Ships with both an interactive wand and pressure sensitive LightPen for interaction
- Five auto features (Auto search, Auto sync, Auto ceiling, Auto keystone and Auto filter alert)
- Seven display modes (Natural, Cinema, Daylight, Green board, White board, Black board and User)
- Side changing lamp and filter
- Advanced anti-theft features, Kensington lock, keypad lock and security anchor bar
- Powerful 8W mono speaker
- Built-in network control software via RJ45 (LAN) connection
- Multi-language OSD (On-Screen Display)
- Closed caption
- Interactive software package included
- Logo capture
- Image freeze function
- TAA compliant

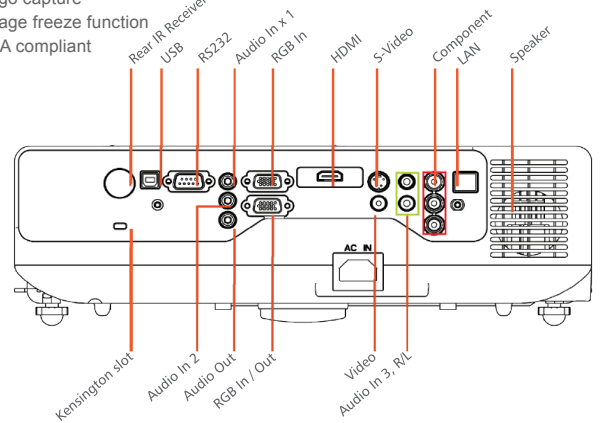

Note: allow 3-5% variance on all projector throw ratios

Award Winning Technical Support 24/7/365

And, of course, all BOXLIGHT products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

©2012 BOXLIGHT, Inc. Specifications subject to change without notice.
Helps meet ADA Section 508 compliance.
BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528

